


Splitters F-type 4 - 1000 MHz

Verteiler F 4-1000 MHz

- High return loss ≥ 20 dB
- Compact zinc die-cast housing
- Screening factor ≥ 80 dB
- F connectors
- Hohe Rückflußdämpfung ≥ 20 dB
- Kompaktes Metalldruckgußgehäuse
- Schirmungsmaß ≥ 80 dB
- F-Anschlußtechnik

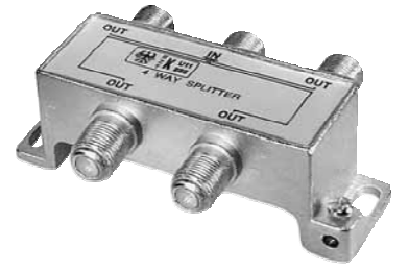

Type		FV 2 2SPFD		FV 3 3SPFD		FV 4 4SPFD		FV 6 6SPFD	
Article no.		3021000		3021100		3021200		3021300	
Outputs		2		3		4		4	
Frequency range	MHz	4 - 470	470 - 1000	4 - 470	470 - 1000	4 - 470	470 - 1000	4 - 470	470 - 1000
Distribution loss	dB	3,2 3.7	3,7 4	5,2 5.5	5,7 5.9	7,0 7.2	7,0 7.7	9,0 9.3	10 9.9
Isolation	dB	≥ 22 20-18	≥ 22 20-18	≥ 22 20-18	≥ 22 20-18	≥ 22 20-18	≥ 22 20-18	≥ 22 20-18	≥ 22 20-18
Return loss	dB	≥ 22	≥ 22	≥ 22	≥ 22	≥ 22	≥ 22	≥ 22	≥ 22

1-way taps F-type 4 - 1000 MHz

1-fach Stichabzweiger F 4-1000 MHz

- Frequency range 4 - 1000 MHz
- High directional isolation
- Compact silver plated die-cast housing
- Screening factor ≥ 80 dB
- F connectors
- Frequenzbereich 4 - 1000 MHz
- Hohe Richtdämpfung
- Versilbertes Metalldruckgußgehäuse in kompakter Bauform
- Schirmungsmaß ≥ 80 dB
- F-Anschlußtechnik



Type / Typ		FA 1-8		FA 1-12		FA 1-16		FA 1-20	
Article no. / Artikel-Nr.		3222000		3222100		3222200		3222300	
Frequency range / Frequenzbereich	MHz	4 - 470	470 - 1000	4 - 470	470 - 1000	4 - 470	470 - 1000	4 - 470	470 - 1000
Through loss / Durchgangsdämpfung	dB	1,5	2,4	0,8	1,1	0,6	0,8	0,6	0,8
Tap loss / Abzweigdämpfung	dB	8,5	8,5	12,5	12,5	16,0	16,0	20,0	20,0
Isolation / outputs / Entkoppelung / Ausgänge	dB	≥ 20	≥ 20	≥ 30	≥ 26	≥ 30	≥ 26	≥ 30	≥ 26
Return loss / Rückflußdämpfung	dB	≥ 20							
Weight / Gewicht	kg	0,054							