

Twisted Pair Transmission

Active Series

Active Video Transceiver (power required), transmission range color 1500 meters, B/W 2400 meters via CAT5 UTP Cable.

Twisted Pair Transmission

TTA111AV

Active Video & Audio & Data Twisted Pair Transmission

- Transmit video, audio and data signal (RS422, RS485).
- Three position range switch for gain select on transmitter.
- Five position distance range switch on receiver, brightness adjustment, two video output.
- Built in transient protection and ground lifting.


Video+Audio+Data



TTA111AVT Transmitter



TTA111AVR Receiver

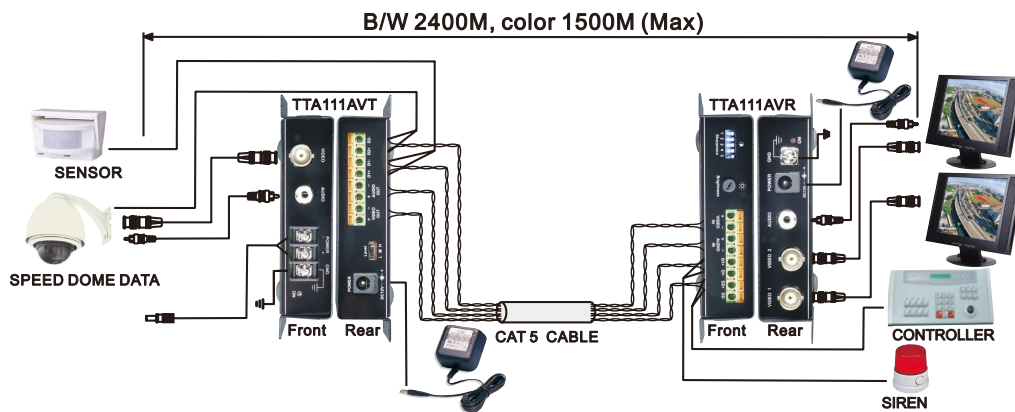

TTA111V

Active Video Twisted Pair Transmission

- Five position range switch for color gain on transmitter, brightness adjustment.
- Five position distance range switch on receiver, brightness adjustment.
- Built in transient protection and ground lifting.
- System is integrated with alarm sensor (PIR, Magnetic, etc...) or RS485/422 data.



TTA111VT Transmitter



TTA111VR Receiver

TTA111VH

Active Receiver with Extra Interference Rejection

- Built in a highly balanced mode of video transmission for extra interference immunity.
- HF,MFLF compensation for color gain and adjustable brightness & contrast for cleaner, sharper looking picture.
- Built in input impedance, balance, liner gain adjustment.
- Built in surge protection.
- Perfect to maintain good quality picture for long-range transmission with DVR.
- Using two sets of TTA111VT+TTA111VH for series connection, range up to 2.4Km(Color), 3Km(B/W).



High Performance