


## DESCRIPTION

The TOA AT-603P is a flush-mounted wall attenuator and uses a transformer which allows connection of a wide range of loads (under 60W). Volume can be adjusted in five steps. The AT-603P features push-in terminals, each of which accepts two conductors for easy bridging.


## SPECIFICATIONS

Input Range	0.5 W ~ 60 W
Attenuation	5 steps (0dB, -6dB, -12dB, -18dB, OFF)
Usable Cable	600 V vinyl-insulated cable (Indoor Vinyl or Heat-resistant Indoor Vinyl cable) Solid cable : $\phi$ 0.8 ~ $\phi$ 1.2 mm Stranded cable (7 cores) : 0.75 ~ 1.25 mm <sup>2</sup>
Terminal	Push-in connector (bridging terminal)
Finish	Knob / Panel / Plate : ABS resin, milk white Case : ABS resin, black
Accessory	M4 X 35 screw.....2 Plate.....1, M3.5 X 5 screw.....2


## APPEARANCE

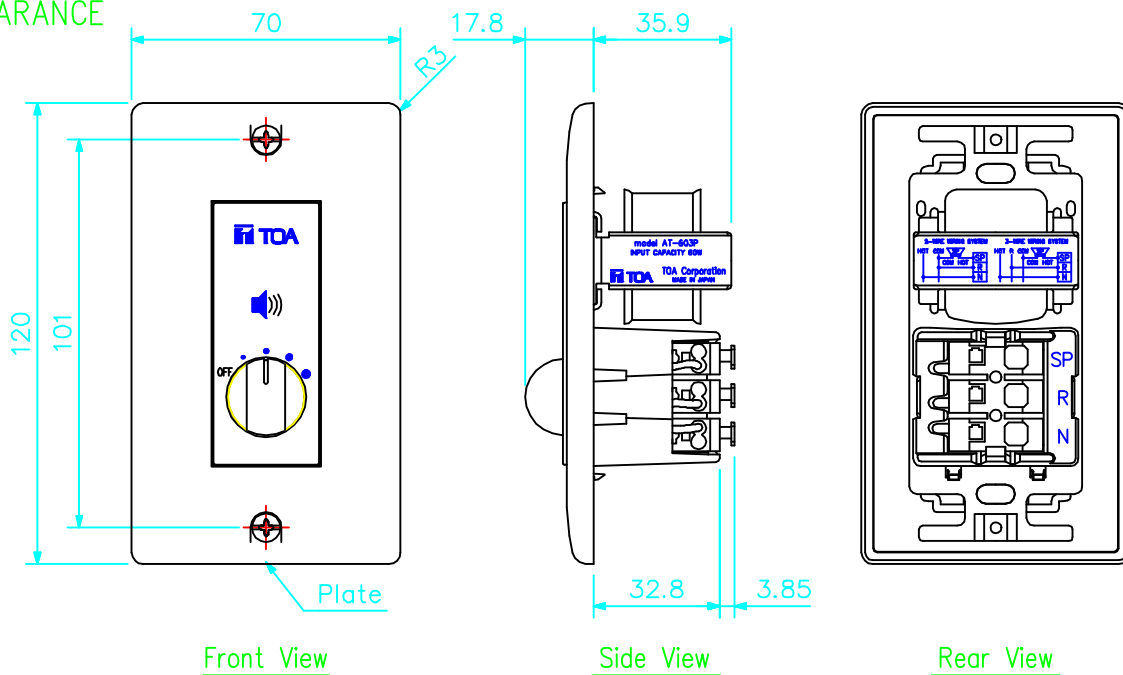

Speaker Output

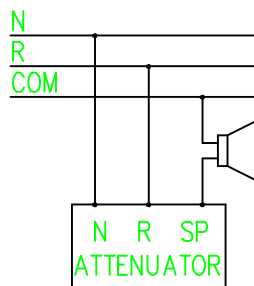

3-WIRE CONNECTION

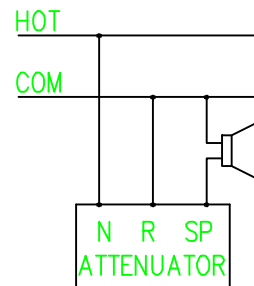

2-WIRE CONNECTION

UNIT:mm SCALE:1/2