

■ DESCRIPTION


The D-001T is a plug-in module designed for use with the 9000 Series amplifiers and can provide two independent balanced inputs. The D-001T can handle signals ranging from microphone level to line level by controlling their input sensitivity in 9 increments from -60 dB to -10 dB. Phantom power (+24 V) can be supplied for condenser microphone use. The D-001T can process effect for TONE/EQ/COMPRESSOR to two inputs independently.

■ SPECIFICATIONS

\* 0 dB = 1 V

Power Source	+24 V DC, -24 V DC, +6 V DC
Current Consumption	20 mA (at +24 V DC), 20 mA (at -24 V DC), 60 mA (at +6 V DC)
Input	2 channels, 3 kΩ (when the phantom power is ON)/10 kΩ (when the phantom power is OFF), electronically-balanced, removable terminal block (3 pins)
Input Sensitivity	-60, -54, -48, -42, -36, -30, -24, -18, -10 dB* (selectable)
Frequency Response	20 - 20,000 Hz, +1, -3 dB
Total Harmonic Distortion + N	0.008% (at 1 kHz, 20 - 20,000 Hz BPF, Input sensitivity: -10 dB)
Input Equivalent Noise	Under -112 dB (at 20 - 20,000 Hz BPF, Input short, Input sensitivity: -60 dB)
S/N Ratio	Over 73 dB (at 20 - 20,000 Hz BPF, Input short, Input sensitivity: -10 dB)
Cross Talk	Over 75 dB (at 20 kHz, Input sensitivity: -10 dB)
CMRR	Over 62 dB (at 1 kHz, Input sensitivity: -60 dB)
A/D Converter	24 bit ΔΣADC
Sampling Frequency	48 kHz
Tone Control	Bass: ±12 dB (at 100 Hz) Treble: ±12 dB (at 10 kHz)
Parametric Equalizer	10 bands, Frequency: 20 - 20,000 Hz, 31 steps, Variable range: ±12 dB, Q: 0.3 - 5
High-pass Filter	-12 dB/oct, Variable frequency range: 20 - 400 Hz, 14 steps
Low-pass Filter	-12 dB/oct, Variable frequency range: 4,000 - 20,000 Hz, 8 steps
Compressor	Depth: 1 - 5
Phantom Power	+24 V DC
Operating Temperature	-10°C to +40°C
Finish	Panel: Aluminum, hair-line
Dimensions	35 (W) X 78 (H) X 91.5 (D) mm
Weight	82 g
Accessory	Removable terminal plug (3 pins) ×2, Module mounting screw ×2

■ APPEARANCE

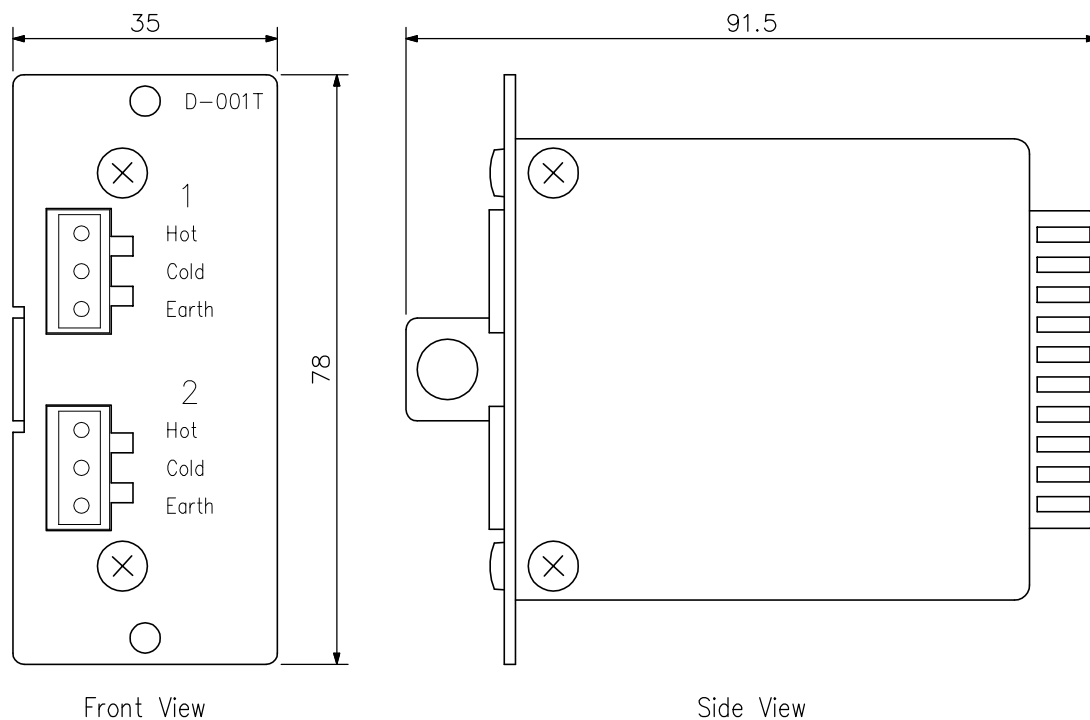

UNIT:mm SCALE:1/1