

DESCRIPTION

Designed for exclusive use with the 9000M2 Series amplifier, the ZM-9014 is a wall mounted remote control panel having 4 buttons and 1 volume control knob. It is used in conjunction with the RC-001T Remote control module.

Scene switching and paging ON/OFF functions can be assigned to the buttons, and input or output channel's volume adjustment to the volume control knob.

It can be mounted in an American standard 2-gang electrical box in the wall.

SPECIFICATIONS

Power Source	24 V DC (supplied from RC-001T)
Current Consumption	50 mA or less
Terminal	Removable terminal block (10 pins)
Connection Cable	Shielded CPEV cable (paired data line and paired power line) or Category 5 twisted pair cable for LAN (CAT5-STP)
Operating Section	4 function buttons, 1 volume control
Indicator	4 function indicators (green LEDs), Level indicators (green LEDs)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	35 % to 80 %RH (no condensation)
Finish	Surface-treated steel plate, white, paint
Dimensions	120 (W) × 127 (H) × 58.5 (D) mm (4.72" × 5" × 2.3")
Weight	300 g (0.66 lb)
Accessory	Box mounting screw (No.6-32UNC × 30) ×4, Box mounting screw (M4 × 30) ×4, Panel mounting screw ×4, Removable terminal plug (10 pins) ×1

APPEARANCE

Note: Since no electrical box is supplied with the unit, prepare it separately.

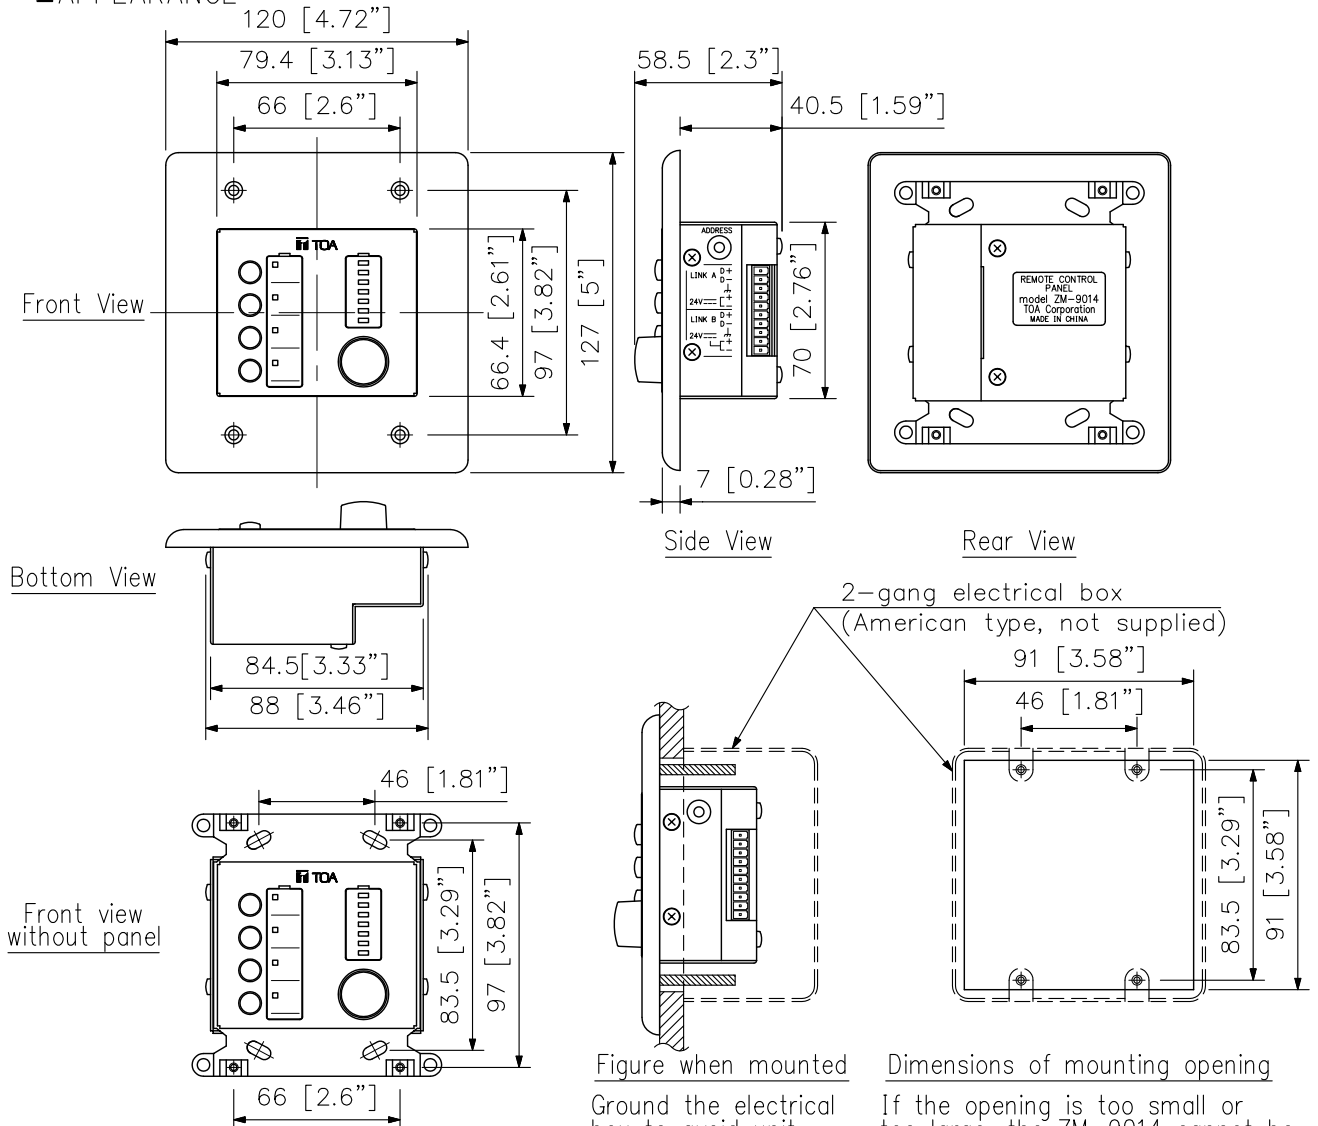


Figure when mounted

Ground the electrical box to avoid unit malfunction due to static electricity.

Dimensions of mounting opening

If the opening is too small or too large, the ZM-9014 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

UNIT:mm SCALE:1/3