

SPRINT™ HOLDFAST

ELECTRO-MAGNETIC LOCKS S0600R SERIES


● SPECIFICATIONS AND TECHNICAL DETAILS

- FACE MOUNTED
- DIMENSIONS :
MAGNET - 203mmLx44mmWx40mmD
ARMATURE PLATE - 158mmLx40mmWx12mmT
- STAINLESS STEEL HOUSING
- CURRENT DRAW : 500mA/12V, 250mA/24V
- DUAL VOLTAGE : 12V/24VDC
- OPTIONS : LOCK STATUS SENSOR
- VOLTAGE SPIKE SUPPRESSOR
- HOLDING FORCE : ABOUT 600LBS
- CE APPROVED ● UL LISTED




■ TYPICAL INSTALLATION


■ SUGGESTED INSTALLATION POSITIONS

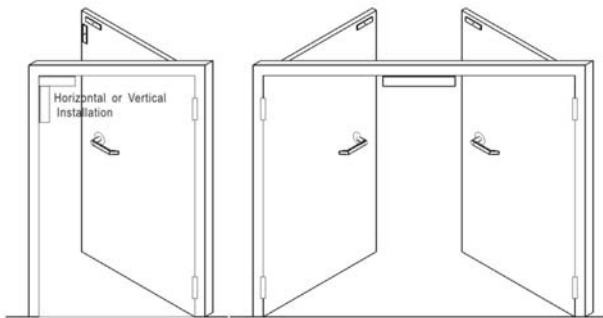

INSTALLATION OF MAGLOCK ON INSWINGING DOOR




INSTALLATION OF
MAGLOCK BODY
ON DOOR FRAME




INSTALLATION OF
ARMATURE PLATE
ON DOOR LEAF

INSTALLATION OF MAGLOCK ON OUTSWINGING DOOR








INSTALLATION OF
MAGLOCK BODY
ON DOOR FRAME



INSTALLATION OF
ARMATURE PLATE
ON DOOR LEAF

■ APPLICATIONS



SPRINT RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.



LISTED
AUXILIARY LOCK 3/4 HR. RATING
30JE