


REV.	REVISION	DATE

SC/PC MM CONNECTOR

LC/PC MM CONNECTOR

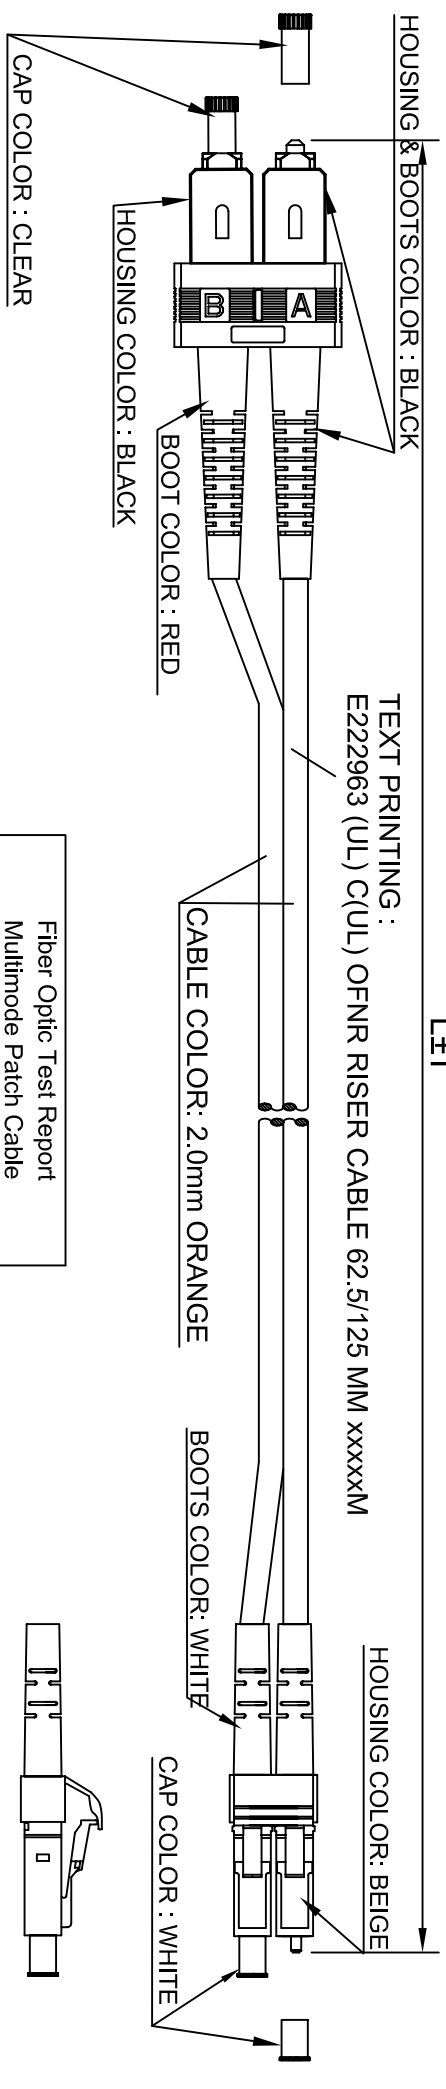

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10Kg.
 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL POLYBAG (DETAIL C)	1 CABLE & TEST REPORT	NONE
MEDIUM POLYBAG	10 CABLES (1M-10M)	SEE "DETAIL B"
LARGE POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

Fiber Optic Test Report Multimode Patch Cable			
Insertion Loss	Printed	Non Printed	
<0.3	A	PASS	PASS
	B	PASS	PASS

TEST REPORT


CHART

FCSCCLC30M	30	30	98.4	98.4'(30000)	±4" (±100)
FCSCCLC20M	20	20	65.6	65.6'(20000)	±4" (±100)
FCSCCLC15M	15	15	49.2	49.2'(15000)	±4" (±100)
FCSCCLC10M	10	10	32.8	32.8'(10000)	±4" (±100)
FCSCCLC07M	07	7	22.97	22.97'(7000)	±2" (±50)
FCSCCLC05M	05	5	16.4	16.4'(5000)	±2" (±50)
FCSCCLC03M	03	3	9.84	9.84'(3000)	±2" (±50)
FCSCCLC02M	02	2	6.56	6.56'(2000)	±2" (±50)
FCSCCLC01M	01	1	3.28	3.28'(1000)	±2" (±50)
PART NO.	**	X	##	L	T


CUSTOMER APPROVAL: _____ DATE: _____

TRENDEX INDUSTRIES (DONG GUAN) CO., LTD.


	UNIT:	Inches[mm]	TITLE:	FIBER OPTIC CABLE DUPLEX MULTIMODE 62.5/125, SC TO LC ORANGE PVC JACKET, x METERS
DRAWN BY	DATE	2011/10/20	CUSTOMER	POMTOP
CHECKED BY	DATE		CUSTOMER PART NO.	FCSCCLC**M
APPROVED BY	DATE		Ref. NO.	
SALE BY	DATE		DRAWING NO.	Pp1110008
			TRENDEX PART NO.	

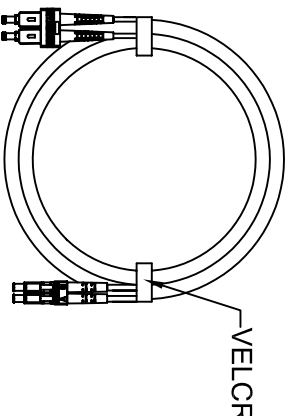

DETAIL A

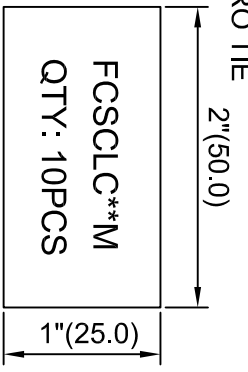

DETAIL B

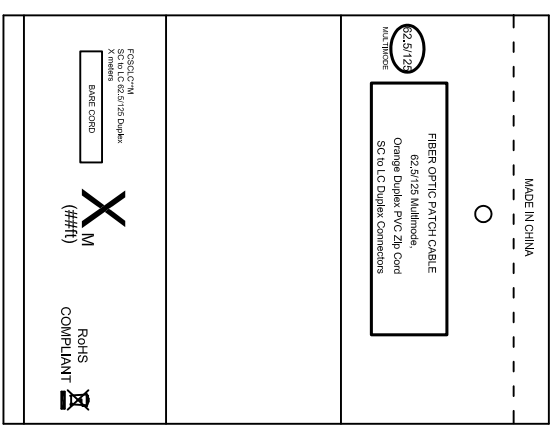

DETAIL C