


REV.	REVISION	DATE

SC/PC MM CONNECTOR

SC/PC MM CONNECTOR

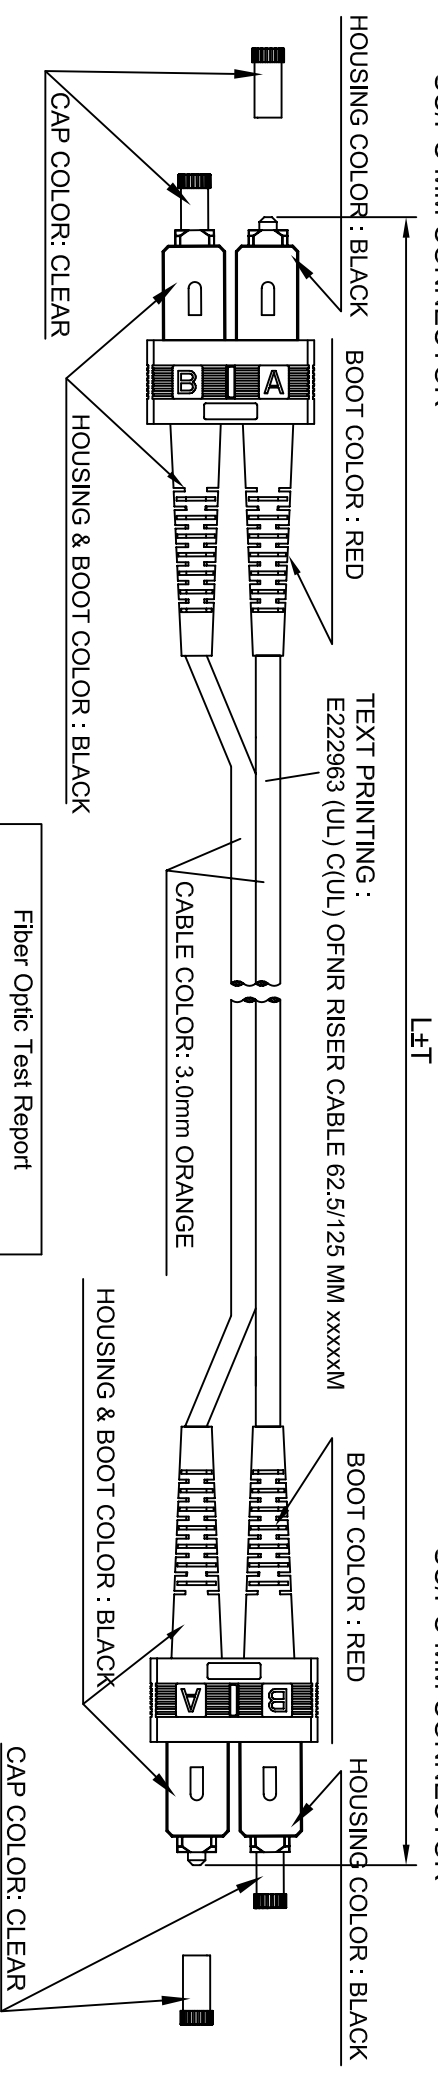

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10Kg.
 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL (DETAIL C)	1 CABLE & TEST REPORT	NONE
MEDIUM	10 CABLES (1M-10M)	SEE "DETAIL B"
LARGE	POLYBAG ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON		

Fiber Optic Test Report			
Multimode Patch Cable			
Insertion Loss	Printed	Non Printed	
<0.3	A	PASS	PASS
	B	PASS	PASS


TEST REPORT

FCSCSC030M	30	30	98.4	98.4(±30000)	±4"(±100)
FCSCSC20M	20	20	65.6	65.6(±20000)	±4"(±100)
FCSCSC15M	15	15	49.2	49.2(±15000)	±4"(±100)
FCSCSC10M	10	10	32.8	32.8(±10000)	±4"(±100)
FCSCSC07M	07	7	22.97	22.97(±7000)	±2"(±50)
FCSCSC05M	05	5	16.4	16.4(±5000)	±2"(±50)
FCSCSC03M	03	3	9.84	9.84(±3000)	±2"(±50)
FCSCSC02M	02	2	6.56	6.56(±2000)	±2"(±50)
FCSCSC01M	01	1	3.28	3.28(±1000)	±2"(±50)
PART NO.	**	X	##	L	T


CUSTOMER APPROVAL:

DATE:

TRENDEX INDUSTRIES (DONG GUAN) CO., LTD.

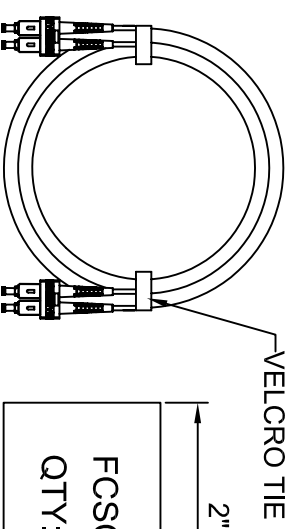


VELCRO TIE

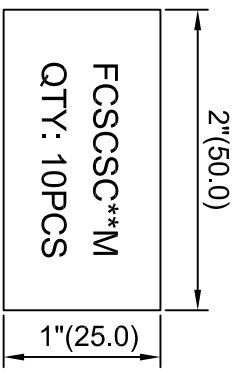

FCSCSC**M
QTY: 10PCS

DETAIL A

DETAIL B

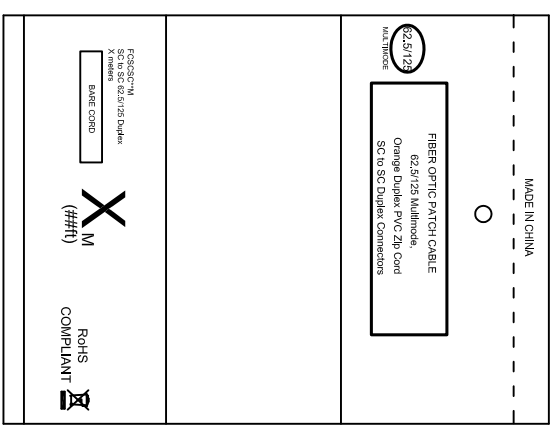

MADE IN CHINA

FIBER OPTIC PATCH CABLE
62.5/125 Multimode,
Orange Duplex PVC Dip Cord
SC to SC Duplex Connectors

X M (##H)

RoHS COMPLIANT

DETAIL C

	UNIT: Inches[mm]	TITLE: FIBER OPTIC CABLE DUPLEX MULTIMODE 62.5/125, SC TO SC ORANGE PVC JACKET, X METERS.
DRAWN BY: Liang	DATE: 2011/10/20	CUSTOMER: PONTOP
CHECKED BY:	DATE:	CUSTOMER PART NO. FCSCSC**M
APPROVED BY:	DATE:	DRAWING NO. Pp1110009
SALE BY:	DATE:	Ref. NO. REV. A
		TRENDEX PART NO.