


REV.	REVISION	DATE



SC/PC MM CONNECTOR

SC/PC MM CONNECTOR


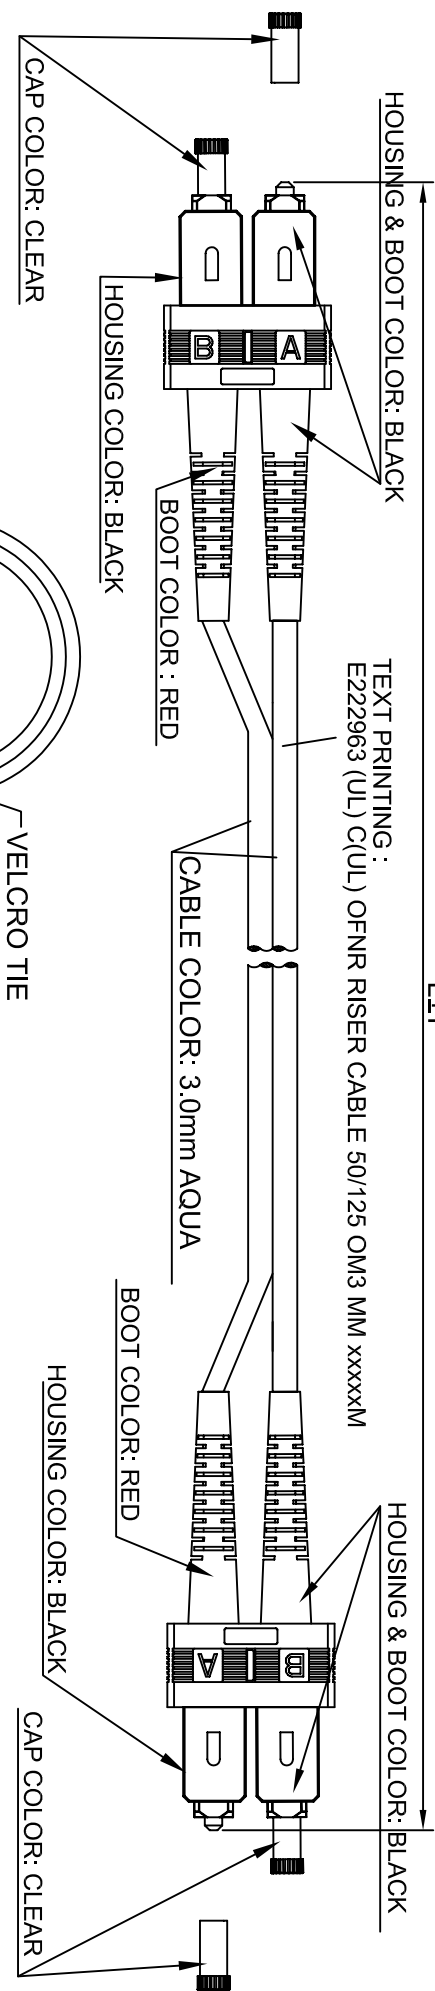


NOTE:

1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGTH: 10Kg.
6. PACKING:

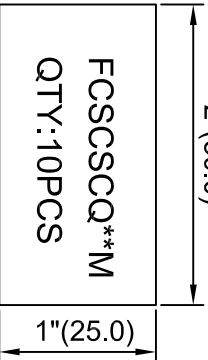

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL POLYBAG (DETAIL C)	1 CABLE & TEST REPORT	NONE
MEDIUM POLYBAG	10 CABLES (1M~10M)	SEE "DETAIL B"
LARGE POLYBAG	ALL	NONE



CHART

FCSCSCQ030M	30	30	98.4	98.4(±3000)	±4(±100)
FCSCSCQ020M	20	20	65.6	65.6(±2000)	±4(±100)
FCSCSCQ015M	15	15	49.2	49.2(±1500)	±4(±100)
FCSCSCQ010M	10	10	32.8	32.8(±1000)	±4(±100)
FCSCSCQ007M	07	7	22.97	22.97(±700)	±2(±50)
FCSCSCQ005M	05	5	16.4	16.4(±500)	±2(±50)
FCSCSCQ003M	03	3	9.84	9.84(±300)	±2(±50)
FCSCSCQ002M	02	2	6.56	6.56(±200)	±2(±50)
FCSCSCQ001M	01	1	3.28	3.28(±100)	±2(±50)
PART NO.	**	X	##	L	T

CUSTOMER APPROVAL:

DATE:

TRENDIX TRENDIX INDUSTRIES (DONG GUAN) CO., LTD.

TITLE: FIBER PATCH CORD, SC TO SC, DUPLEX MUL TIMODE 50/125 AQUA PVC, X METER.

UNITS:	Inches [mm]	CUSTOMER PART NO.	FCSCSCQ**M
DRAWN BY:	Liang	DRAWING NO.	Pp1110006
CHECKED BY:	DATE: 2011/10/20	REV. NO.	A
APPROVED BY:	DATE:	REV.	A
SALE BY:	DATE:	TRENDIX PART NO.	

TEST REPORT

Fiber Optic Test Report			
Multimode Patch Cable			
Insertion Loss	<0.3	Printed	Non Printed
		A	PASS
		B	PASS