


REV.	REVISION	DATE

SC/PC SM CONNECTOR

L+T

LC/PC SM CONNECTOR

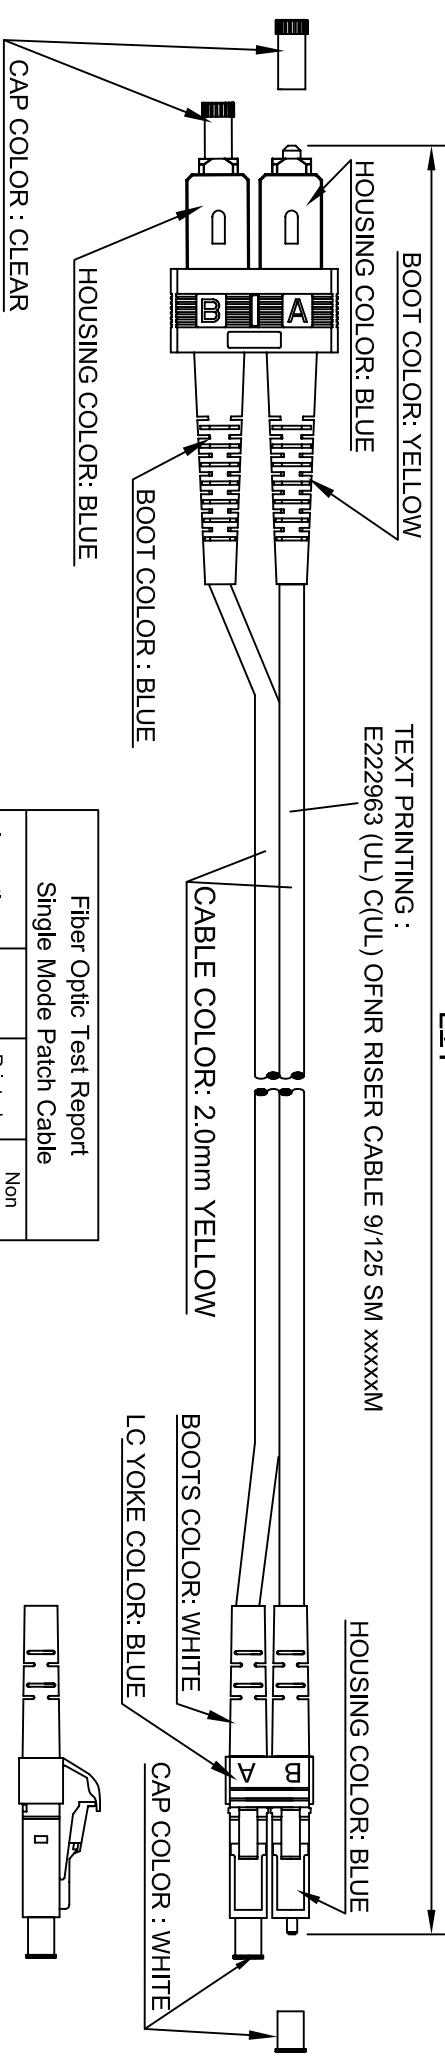

BOOT COLOR: YELLOW
HOUSING COLOR: BLUE

TEXT PRINTING :
E222963 (UL) C(UL) OFNR RISER CABLE 9/125 SM xxxxxM

HOUSING COLOR: BLUE

CABLE COLOR: 2.0mm YELLOW


BOOTS COLOR: WHITE
LC YOKE COLOR: BLUE

CAP COLOR : WHITE

CAP COLOR : CLEAR

HOUSING COLOR: BLUE

BOOT COLOR : BLUE

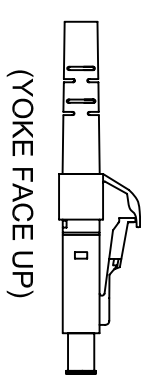





NOTE:

1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGTH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL (DETAIL C)	1 CABLE & TEST REPORT	NONE
MEDIUM POLYBAG	10 CABLES(1M~10M)	SEE "DETAIL B"
LARGE POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON		

Fiber Optic Test Report Single Mode Patch Cable			
Insertion Loss	Printed	Non Printed	
<0.3	A PASS	B PASS	PASS
Return Loss	A PASS	B PASS	PASS
>55dB	A PASS	B PASS	PASS

TEST REPORT

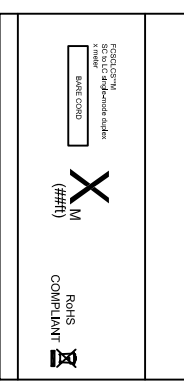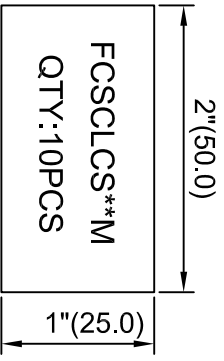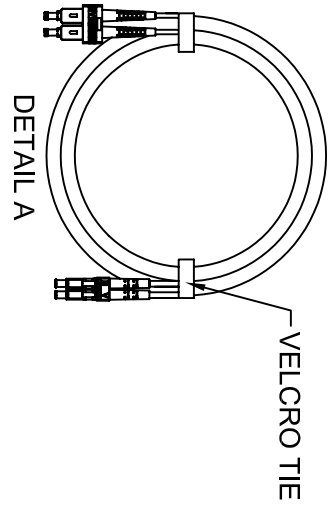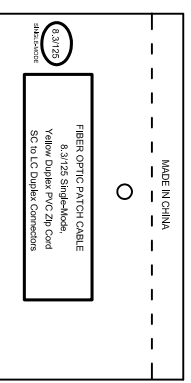

CHART

FCSC LCS30M	30	30	98.4	98.4'(30000)	±4(±100)
FCSC LCS20M	20	20	65.6	65.6'(20000)	±4(±100)
FCSC LCS15M	15	15	49.2	49.2'(15000)	±4(±100)
FCSC LCS10M	10	10	32.8	32.8'(10000)	±4(±100)
FCSC LCS07M	07	7	22.97	22.97'(7000)	±2(±50)
FCSC LCS05M	05	5	16.4	16.4'(5000)	±2(±50)
FCSC LCS03M	03	3	9.84	9.84'(3000)	±2(±50)
FCSC LCS02M	02	2	6.56	6.56'(2000)	±2(±50)
FCSC LCS01M	01	1	3.28	3.28'(1000)	±2(±50)
PART NO.	**	X	##	L	T

CUSTOMER APPROVAL:

DATE:

TRENDIX INDUSTRIES (DONG GUAN) CO., LTD.

 DRAWN BY: Liang CHECKED BY: APPROVED BY: SALE BY:	UNIT: Inches [mm] DATE: 2011/10/20 DATE: DATE:	TITLE: FIBER OPTIC CABLE, SINGLEMODE MINI-ZIPCORD, DUPLEX, SC TO LC, YELLOW JACKET, X M. CUSTOMER: PONTOP DRAWING NO: PP-110002 TRENDIX PART NO.:	CUSTOMER PART NO.: FCSC LCS**M Ref. NO.: REV.: A
--	---	--	--