
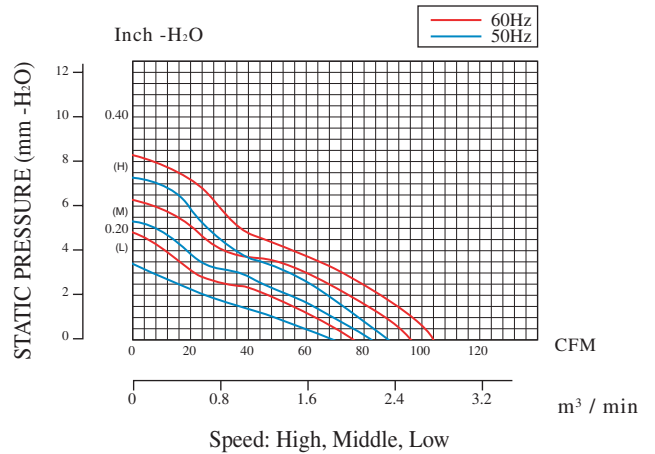


120 x 120 x 38mm

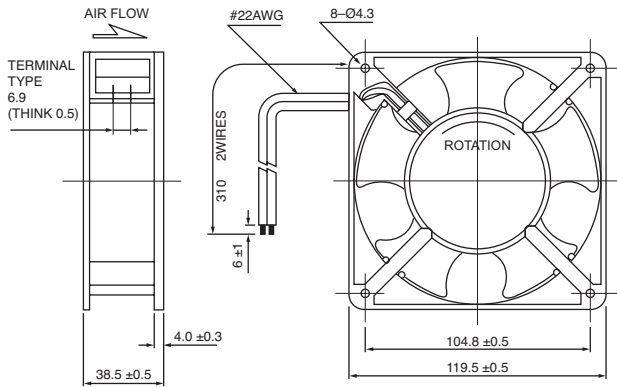

Frame Type: Aluminum painted & Plastic UL94V-O  
Impeller: Thermoplastic UL94V-O P.B.T.

Model	Part No. Terminal Leadwire	Bearing System	Rated Voltage (V)	Freq (Hz)	Current (A)	Input Power (W)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mm-H <sub>2</sub> O)	Noise Level (dB-A)	Weight (g)
(型號)	(端子/出線)	(培林)	(電壓)	(頻率)	(電流)	(功率)	(轉速)	(風量)	(靜壓)	(噪音值)	(重量)
HPE-1238HA1	1238HA1SAT(L) 1238HA1BAT(L)	Sleeve Ball	110/120	50/60	0.21/0.28	16/25	2600/3000	84/100	0.28/0.34	45/51	520
HPE-1238HA2	1238HA2SAT(L) 1238HA2BAT(L)	Sleeve Ball	220/240	50/60	0.09/0.12	15/22	2600/3000	84/100	0.28/0.34	45/51	520
HPE-1238MA1	1238MA1SAT(L) 1238MA1BAT(L)	Sleeve Ball	110/120	50/60	0.13/0.17	10/14	2500/2800	80/90	0.18/0.24	39/43	520
HPE-1238MA2	1238MA2SAT(L) 1238MA2BAT(L)	Sleeve Ball	220/240	50/60	0.07/0.09	11/16	2500/2800	80/90	0.18/0.24	39/43	520
HPE-1238LA1	1238LA1SAT(L) 1238LA1BAT(L)	Sleeve Ball	110/120	50/60	0.10/0.12	9/11	1900/2500	65/78	0.10/0.18	35/40	520
HPE-1238LA2	1238LA2SAT(L) 1238LA2BAT(L)	Sleeve Ball	220/240	50/60	0.05/0.06	9/11	1900/2500	65/78	0.10/0.18	35/40	520

Specifications subject to change without notice.  
以上參考數據，如有變更恕不另行通知。