
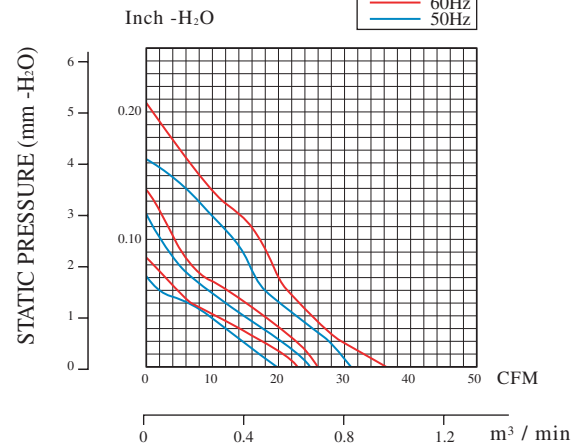
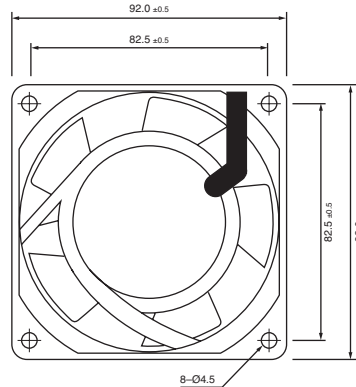


92 x 92 x 25mm

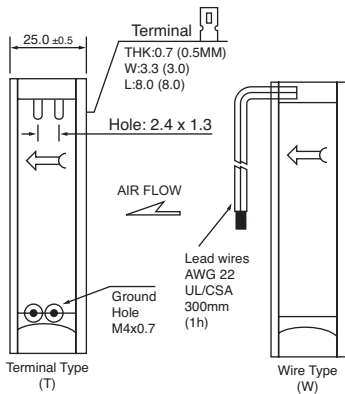

Frame Type: Aluminum painted & Plastic UL94V-O
Impeller: Thermoplastic UL94V-O P.B.T.

Model	Part No. Terminal Leadwire	Bearing System	Rated Voltage (V)	Freq (Hz)	Current (A)	Input Power (W)	Speed (rpm)	Air Flow (CFM)	Static Pressure (mm-H ₂ O)	Noise Level (dB-A)	Weight (g)
(型號)	(端子/出線)	(培林)	(電壓)	(頻率)	(電流)	(功率)	(轉速)	(風量)	(靜壓)	(噪音值)	(重量)
HPE-92025HA1	92025HA1SAT(L) 92025HA1BAT(L)	Sleeve Ball	110/120	50/60	0.20/0.21	19/17	2400/2800	30/36	0.16/0.20	35/37	230
HPE-92025HA2	92025HA2SAT(L) 92025HA2BAT(L)	Sleeve Ball	220/240	50/60	0.09/0.10	19/17	2400/2800	30/36	0.16/0.20	35/37	230

Specifications subject to change without notice.

以上參考數據，如有變更恕不另行通知。