

RK 1 -11 03 A b



接触电阻	20mΩ,MAX
绝缘电阻	500VDC,50MΩ
耐压电阻	1250VAC,1MIN
工作温度	T100
电器寿命	10,000 Cycles
工作参数	6A(250VAC,125VAC,24VDC,12VDC)

安装尺寸参数表

[浏览电路特性表](#)

[浏览端子种类表](#)

[浏览面罩种类表](#)

安装尺寸




RK2-01

相关认证



电路特性	06,08
面罩种类	C
端子种类	m,l

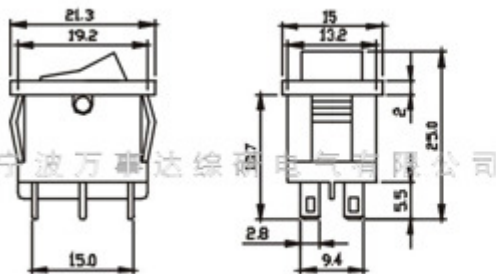

安装孔尺寸
Panel cut-out



X	Y	Z
0.75...1.25	19.3 ^{+0.1}	13.3 ^{+0.1}
1.25...2.00	19.4 ^{+0.1}	13.3 ^{+0.1}
2.00...3.00	19.5 ^{+0.1}	13.3 ^{+0.1}

X:安装面板厚度 (Panel Thickness)