


POCKET TYPE DIGITAL MULTIMETER

Model **MCD-008**

with the NEW & UNIQUE FUNCTION CORD REEL TEST LEAD TYPE
Test Lead Wires can be internally rolled up into the body case by one touch switch.

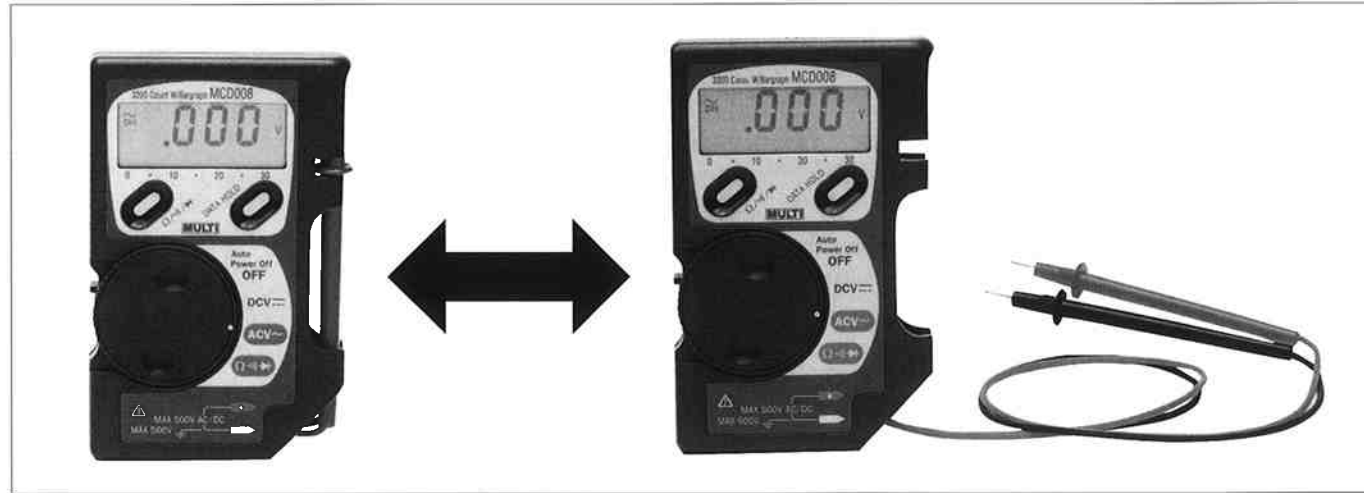

FEATURES

- Ultra compact size and light weight.
- Easy operation with rotary switch.
- AC/DC voltage, resistance, continuity check and diode test with full autoranging operation.

SPECIFICATIONS

Display	: 3 1/2 digit LCD, max. reading of 3200	Operating temperature	: 0°C to 40°C, < 70% RH (Non-condensing)
Polarity	: Automatic, (-)negative polarity indication.	Storage temperature	: 20°C to 60°C, < 80% RH (Non-condensing)
Over range indication	: "OL" mark on LCD readout	Power supply	: LR-44(1.55V) × 2
Low battery indication	: "□" mark is displayed when the battery voltage drops below operating voltage.	Power consumption	: 5.0 mW
Sampling	: 2 times/sec.	Size	: 72(W)×114(H)×22.5(D)mm
Auto power off	: The meter is set to power off mode approx. 10 minutes after the power switch on.	Weight	: Approx. x100g (Including batteries)
		Accessories	: instruction manual 1 Batteries 2

Measuring ranges(23°C±5°C, > 80% RH or less)

DC Voltage

Range	Resolution	Accuracy	Input resistance	Max. input
320mV	100μV	±1.3% rdg ±3 dgt	>1000MΩ	500V DC or AC rms
3.2V	1mV	±0.7% rdg ±3 dgt	Approx. 11MΩ	
32V	10mV	±1.3% rdg ±3 dgt	Approx. 10MΩ	
320V	100mV			
500V	1V			

AC Voltage (50/60Hz)

Range	Resolution	Accuracy	Input impedance	Max. input
3.2V	1mV	±2.3% rdg ±6 dgt	Approx. 11MΩ	500V DC or AC rms
32V	10mV		Approx. 10MΩ	
320V	100mV			
500V	1V			

Resistance

Range	Resolution	Accuracy	Test current	Input protection
320Ω	100mΩ	±2.0% rdg ±5 dgt	< 0.7mA	500V DC or AC rms
3.2KΩ	1Ω		< 0.13mA	
32KΩ	10Ω	±2.0% rdg ±3 dgt	< 13μA	
320KΩ	100Ω		< 1.3μA	
3.2MΩ	1KΩ	±6.0% rdg ±4 dgt	< 0.13μA	
32MΩ	10KΩ	±10% rdg ±10 dgt		

Diode Test

Range	Resolution	Accuracy	Test current	Input protection
3.2V	1mV	±10% rdg ±3 dgt	Approx. 0.7mA (Vf=0.6V)	500V DC or AC rms

Continuity Check

Range	Resolution	Continuity Beeper	Test current	Input protection
320Ω	100mΩ	< Approx.20Ω	< 0.7mA	500V DC or AC rms

POCKET TYPE DIGITAL MULTIMETER

TRUE RMS READING

Model **MCD-009**



- * Book Case Type
- * Size : 60(W)×110(H)×9.5(D)mm
- * Weight : Approx. 86g

FEATURES

- Ultra compact size and light weight.
- Easy operation with rotary switch.
- AC/DC voltage, resistance, continuity check and diode test with full autoranging operation.

SPECIFICATIONS

Display	: 3 1/2 digit LCD, max. reading of 3200	Operating temperature	: 0°C to 40°C, <70% RH(Non-condensing)
Polarity	: Automatic, (-)negative polarity indication.	Storage temperature	: 20°C to 60°C, <80%RH(Non-condensing)
Over range indication	: "OL" mark on LCD readout	Power supply	: LR-44 (1.55V)×2
Low battery indication	: "□" mark is displayed when the battery voltage drops below operating voltage	Power consumption	: 5.0mW
Sampling	: 2 times/sec.	Accessories	: Instruction manual.....1 Batteries.....2
Auto power off	: The meter is set to power off mode approx. 10 minutes after the power switch on.		

Measuring ranges (23°C±5°C, > 80% RH or less)

DC Voltage

Range	Resolution	Accuracy	Input resistance	Max. input
320mV	100μV	±1.3% rdg ±3 dgt	>1000MΩ	500V DC or AC rms
3.2V	1mV	±0.7% rdg ±3 dgt	Approx. 11MΩ	
32V	10mV	±1.3% rdg ±3 dgt	Approx. 10MΩ	
320V	100mV			
500V	1V			

AC Voltage (50/60Hz)

Range	Resolution	Accuracy	Input impedance	Max. input
3.2V	1mV	±1.3% rdg ±5 dgt	Approx. 11MΩ	500V DC or AC rms
32V	10mV	±2.0% rdg ±6 dgt	Approx. 10MΩ	
320V	100mV			
500V	1V			

Resistance

Range	Resolution	Accuracy	Test current	Input protection
320Ω	100mΩ	±2.0% rdg ±5 dgt	< 0.7mA	500V DC or AC rms
3.2KΩ	1Ω		< 0.13mA	
32KΩ	10Ω	±2.0% rdg ±3 dgt	< 13μA	
320KΩ	100Ω		< 1.3μA	
3.2MΩ	1KΩ	±6.0% rdg ±4 dgt	< 0.13μA	
32MΩ	10KΩ	±10% rdg ±10 dgt		

Diode Test

Range	Resolution	Accuracy	Test current	Input protection
3.2V	1mV	±10% rdg ±3 dgt	Approx. 0.7mA (Vf=0.6V)	500V DC or AC rms

Continuity Check

Range	Resolution	Continuity Beeper	Test current	Input protection
320Ω	100mΩ	< Approx.20Ω	< 0.7mA	500V DC or AC rms