

JAPANESE | ENGLISH

Products Information • Customer Support • Friendly innovation

HAKKO DASH

HAKKO FG-100 NEW

HAKKO FM-202

HAKKO FM-2026

HAKKO FM-2027/2028 NEW

HAKKO FT-700

HAKKO FX-301

HAKKO FX-780

HAKKO FX-791

HAKKO FX-901

HAKKO FX-951

HAKKO FX-952

HAKKO JUNIOR HAKKO MACH-I

HAKKO MATCHLESS

HAKKO MG

HAKKO PORTABLE

HAKKO PRESTO

HAKKO RED

HAKKO SOLDERING POT

HAKKO U

HAKKO 192

HAKKO 373

HAKKO 374

HAKKO 375

HAKKO 455/456

HAKKO 485

HAKKO 487

HAKKO 599B

HAKKO 604

HAKKO 611

HAKKO 887B

HAKKO 928

HAKKO 931

HAKKO 933/934

HAKKO 936

HAKKO 937

HAKKO 938

HAKKO 951/952

HAKKO 953

HAKKO 957 NEW

HAKKO IRON HOLDER

TOP > Products Information > Products Search > Soldering > HAKKO SOLDERING P

Soldering

## HAK(O SOLDERING POT



Temperature controled type

Catalog Request


Catalog Download

#### **Features**

## Large-capacity solder bath holds a larger amount of solder, solder temperature remains high even during continuous soldering operations.

- The stainless steel solder bath and other heavy-duty components offer gre durability, while the solder overflow prevention rim around the bath provide greater safety.
- The raised rim around the bath enhances soldering and desoldering efficie
- A waste collector adds a final tough of operating ease and efficiency.

### Dimensions of Solder Bath

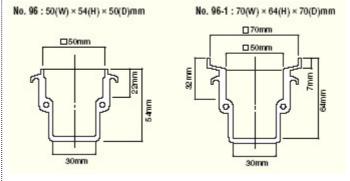

Operation





# **Specifications**

Model No.	96	96-1
Power Consumption	200W	
Heating Element	Ceramic Heater	
Temperature	100℃ - 450℃	100℃ - 38
Insulation Resistance	Over 100M ohm (250°C)	
Dimension of Solder Bath	50(W) x 54(H)	70(W) x 64
	x 50(D) mm	x 70(D) m
Capacity of Solder Bath	Approx. 850g of	Approx. 120
	melted solder	melted sol
Outer Dimensions	135(W) x 105(H)	135(W) x 12
	x 224(D) mm	x 224(D) r
Weight	Approx. 1.5kg	Approx. 1.



Copyright © 1999-2006 HAKKO Corpora