



## 2-Port USB KVMP Switch with Audio Support CS1732

ATEN's new 2-port KVM and Peripheral Sharing Switch brings extra value to conventional KVM switches by offering USB peripheral sharing capabilities, audio and microphone support, and multi-platform support for Mac, Sun, USB and PS/2. You can save money and space by eliminating the need for multiple monitors, keyboards, mice, and peripheral devices such as printers, scanners, zip drives, and more. Up to 127 different USB devices can be daisy chained from this KVMP switch. Sharing speakers and a microphone also offers extra value and convenience for the users. USB and KVM technology together makes cross-platform management easy. A single USB console can control PCs, Macs, or even Sun workstations, and share peripherals and audio devices between the computers. Any USB-enabled computers, using any USB-compatible operating system, can benefit from the efficiency, expense reduction and convenience of this switch.


Distributor Part NO. : Contact Aten for part number @ 949.428.1111

### I Features:

One console controls two computers and two additional USB 1.1 devices Capable of independent (asynchronous) switching of KVM and peripheral USB ports Dual interface - supports computers with PS/2 or USB keyboards and mice Computer selection via front panel switches or Hotkeys Supports PC, Mac, and Sun systems Superior video quality; 2048 x 1536; DDC2B Fully compliant with USB 1.1 specification Firmware upgradable for life Hi Tech Pure USB KVMP Switch. No PS/2 to USB Conversion! Audio enabled

### I Diagram :

1. Port selection switches
2. USB Console ports for keyboard and mouse
3. Audio ports for speakers, microphone etc.
4. USB ports for two USB Peripherals
5. Power adapter
6. Monitor, speakers, mic connection
7. Computer connections (PC and Mac)

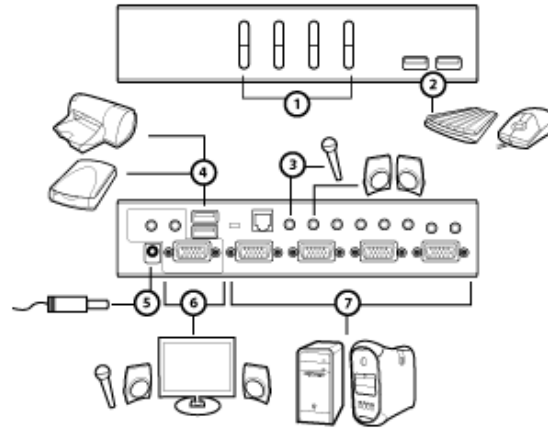

## Requirements:

Computers with USB or PS/2 connections (additional cables needed for PS/2 computers, USB peripheral ports won't function when use PS/2 cables) Windows 98, 98SE, ME, 2000, XP Mac OS 8.6 or greater Sun Solaris work station Linux, UNIX and other USB supported systems\* \*Additional drivers and support may be needed

## Package Content:

- 1x 2 Port KVM Switch
- 2x KVM Cables (part # 2L5301U)
- 1x Firmware Upgrade Cable
- 1x User Manual
- 1x Quick Start Guide

## Specification :

* Master Carton	
Width	13.5 in. (34.3 cm)
* Master Carton Qty.	10
Depth	20.0 in. (50.8 cm)
Height	8.0 in. (20.3 cm)
*** Unit Package Dimensions	
Depth	9.375 in.

Height	2.375 in.
Width	6.875 in.
Computer Connections	
Direct	2
Emulation	
Mouse	USB Plug-n-Play
Keyboard	USB Plug-n-Play
LEDs	
Selected	2
USB Peripherals	2
On Line	2
Console Connectors	
Monitor	1 x HDB-15 Female (Std. VGA/SVGA)
Mouse	1 x USB Type A
Audio	1 x stereo speaker; 1 x Microphone
Flash ROM Upgrade	1 x RJ11 socket
Keyboard	1 x USB Type A
Power	
Amps	2.1A
Voltage	DC 5V
Housing	
Case	Metal
Weight	
Unit Pack Wt.	3 lbs.
Master Carton Wt.	29.1 lb. (13.2 kg)
*** Unit Dimensions	
Height	2.25 in. (5.715 cm.)
Depth	7 in. (17.78 cm.)
Width	9.5 in. (24.13 cm.)
CPU Connectors	
Keyboard, Mouse, and Monitor	2 x SPDB15
Peripherals	2 x USB Type A
Audio	2 x stereo speaker; 2 x Microphone
Peripheral Sharing	USB, selected through Hotkeys
Video Resolution	2048x1536 (Max.); DDC/ DDC2B/ DDC2AB
Humidity	0 - 80% RH
Scan Interval	5 sec.
Operating Temperature	4 - 40 C
Port Selection	Push button, Hot Keys
Storage Temperature	-20 - 60 C
Power Consumption	Bus powered, power adapter for additional power